Three Phase Inverter with Synergy Technology

For the 277/480V Grid for North America

INVERTERS

SE80KUS / SE100KUS / SE110KUS / SE120KUS

Powered by unique pre-commissioning process for rapid system installation

- Pre-commissioning feature for automated validation of system components and wiring during the site installation process and prior to grid connection
- Easy 2-person installation with lightweight, modular design (each inverter consists of 2 or 3 Synergy units and one Synergy Manager)
- Independent operation of each Synergy unit enables higher uptime and easy serviceability
- Built-in thermal sensors detect faulty wiring ensuring enhanced protection and safety
- Built-in arc fault protection and rapid shutdown
- Built-in PID mitigation for maximized system performance
- Monitored* and field-replaceable surge protection devices, to better withstand surges caused by lightning or other events
- Built-in module-level monitoring with Ethernet or cellular communication for full system visibility

*Applicable only for DC and AC SPDs

solaredge

/ Three Phase Inverter with Synergy Technology

For the 277/480V Grid for North America

SE80KUS / SE100KUS / SE110KUS/ SE120KUS

Applicable to inverter with Part Numbers	SExxK-US08Ixxxx				
	SE80KUS	SE100KUS	SE110KUS	SE120KUS	
OUTPUT					
Rated AC Active Output Power	80000	100000	110000	120000	W
Maximum AC Apparent Output Power	80000	100000	120000	120000	VA
AC Output Line Connections	3W + PE, 4W + PE				
Supported Grids	WYE: TN-C, TN-S, TN-C-S, TT, IT; Delta: IT				
AC Output Voltage Minimum-Nominal-Maximum[1] (L-N)	244 - 277 - 305				Vac
AC Output Voltage Minimum-Nominal-Maximum[1] (L-L)	422.5 - 480 - 529				Vac
AC Frequency Min-Nom-Max[1]	59.5 - 60 - 60.5				Hz
Maximum Continuous Output Current (per Phase, PF=1)	96.5	120	145		Aac
GFDI Threshold	1				A
Utility Monitoring, Islanding Protection, Configurable Power Factor, Country Configurable Thresholds	Yes				
Total Harmonic Distortion	≤ 3				%
Power Factor Range	+/-0.2 to 1				
INPUT					
Maximum DC Power (Module STC) Inverter / Synergy Unit	120000 / 60000	150000 / 50000	180000 / 60000		W
Transformer-less, Ungrounded	Yes				
Maximum Input Voltage DC+ to DC-	1000				Vdc
Operating Voltage Range	850 - 1000				Vdc
Maximum Input Current	2 x 48.25	3 x 40	3 x 48.25		Adc
Reverse-Polarity Protection	Yes				
Ground-Fault Isolation Detection	167kΩ sensitivity per Synergy Unit[2]				
CEC Weighted Efficiency	98.5				%
Nighttime Power Consumption	< 8	< 12			W
ADDITIONAL FEATURES					
Supported Communication Interfaces[3]	2 x RS485, Ethernet, Wi-Fi (optional), Cellular (optional)				
Smart Energy Management	Export Limitation				
Inverter Commissioning	With the SetApp mobile application using built-in Wi-Fi access point for local connection				
Arc Fault Protection	Built-in, User Configurable (According to UL1699B)				
Photovoltaic Rapid Shutdown System	NEC 2014, 2017 and 2020, Built-in				
PID Rectifier	Nighttime, built-in				
RS485 Surge Protection (ports 1+2)	Type II, field replaceable, integrated				
AC, DC Surge Protection	TypeII, field replaceable, integrated				
DC Fuses (Single Pole)	25A, integrated				
DC SAFETY SWITCH					
DC Disconnect	Built-in				
STANDARD COMPLIANCE					
Safety	UL1699B, UL1741, UL1741 SA, UL1998, CSA C22.2#107.1, Canadian AFCI according to T.I.L. M-07				
Grid Connection Standards	IEEE 1547, Rule 21, Rule 14 (HI)				
Emissions	FCC part 15 class A				

(1) For other regional settings please contact SolarEdge support

(2) Where permitted by local regulations

(3) For specifications of the optional communication options, visit https://www.solaredge.com/products/communication or the Resource Library webpage: https://www.solaredge.com/downloads#, to download the relevant product datasheet

/ Three Phase Inverter with Synergy Technology

For the 277/480V Grid for North America

SE80KUS / SE100KUS / SE110KUS/ SE120KUS

Applicable to inverter with Part Numbers	SExxK-US08Ixxxx				
	SE80KUS	SE100KUS	SE110KUS	SE120KUS	
INSTALLATION SPECIFICATIONS					
Number of Synergy Units per Inverter	2	3			
AC Max Conduit Size	2 ½"				in
Max AWG Line / PE	4/0 / 1/0				
DC Max Conduit Size	1 x 3" ; 2 x 2"				in
DC Input Inverter / Synergy Unit	4 pairs; 6-12 AWG	12 / 4 pairs; 6-12 AWG			
Dimensions (H x W x D)	Synergy Unit: 22 x 12.9 x 10.75 / 558 x 328 x 273 Synergy Manager: 14.17 x 22.4 x 11.6 / 360 x 560 x 295				in/m
Weight	Synergy Unit: 70.4 / 32 Synergy Manager: 39.6 / 18				lb /kg
Operating Temperature Range	-40 to +140 / -40 to +60(4)				F / °C
Cooling	Fan (user replaceable)				dBA
Noise	< 67				
Protection Rating	NEMA 3R				
Mounting	Brackets provided				

(4) For power de-rating information refer to: https://www.solaredge.com/sites/default/files/se-temperature-derating-note.pdf

© SolarEdge Technologies, Ltd. All rights reserved. SOLAREDGE, the SolarEdge logo, OPTIMIZED BY SOLAREDGE are trademarks or registered trademarks of SolarEdge Technologies, Inc. All other trademarks mentioned herein are trademarks of their respective owners. Date: February 20, 2022 DS-000020-NA. Subject to change without notice.

CE RoHS

Three Phase Inverters for the 277/480V Grid

For North America

SE20KUS / SE30KUS / SE33.3KUS / SE40KUS

INVERTERS

The best choice for SolarEdge enabled systems

- Specifically designed to work with power optimizers
- Quick and easy inverter commissioning directly from a smartphone using the SolarEdge SetApp
- Fixed voltage inverter for superior efficiency (98.5%) and longer strings
- Built-in type 2 DC and AC Surge Protection, to better withstand lightning events
- Small, lightest in its class, and easy to install outdoors or indoors on provided bracket
- Integrated arc fault protection and rapid shutdown for NEC 2014 and 2017, per article 690.11 and 690.12
- Built-in module-level monitoring with Ethernet, wireless or cellular communication for full system visibility
- Integrated Safety Switch
- UL1741 SA certified, for CPUC Rule 21 grid compliance

solaredge

/ Three Phase Inverters for the 277/480V Grid[1]

For North America

SE20KUS / SE30KUS / SE33.3KUS / SE40KUS

MODEL NUMBER	SE20KUS	SE30KUS	SE33.3KUS	SE40KUS	UNITS
APPLICABLE TO INVERTERS WITH PART NUMBER	SEXXK - USXXXBXXX	SEXXK-USX8IXXXX			
OUTPUT					
Rated AC Power Output	20000	30000	33300	40000	W
Maximum apparent AC output power	20000	30000	33300	40000	VA
AC Output Line Connections	4W + PE	3W + PE, 4W + PE			
AC Output Voltage Minimum-Nominal-Maximum[2] (L-N)	244 - 277 - 305				Vac
AC Output Voltage Minimum-Nominal-Maximum[2] (L-L)	422.5 - 480 - 529				Vac
AC Frequency Min-Nom-Max[2]	59.3 - 60 - 60.5				Hz
Maximum Continuous Output Current (per Phase)	24	36.25	40	48.25	Aac
GFDI Threshold	1				A
Utility Monitoring, Islanding Protection, Country Configurable Set Points	Yes				
Total Harmonic Distortion	≤ 3				%
Power Factor Range	+/- 0.85 to 1				
INPUT					
Maximum DC Power (Module STC)	27000	45000	50000	60000	W
Transformer-less, Ungrounded	Yes				
Maximum Input Voltage DC+ to DC-	1000				Vdc
Operating Voltage Range	840 - 1000				Vdc
Maximum Input Current	26.5	36.25	40	48.25	Adc
Maximum Input Short Circuit Current	33	55			Adc
Reverse-Polarity Protection	Yes				
Ground-Fault Isolation Detection	1MΩ Sensitivity	167kΩ Sensitivity[3]			
CEC Weighted Efficiency	98	98.5			%
Night-time Power Consumption	<3	<4			W
ADDITIONAL FEATURES					
Supported Communication Interfaces	2 x RS485, Ethernet, Cellular (optional)				
Inverter Commissioning	With the SetApp mobile application using built-in access point for local connection				
Arc Fault Protection	Integrated, User Configurable (According to UL1699B)				
Rapid Shutdown	NEC2014, NEC2017 and NEC2020 compliant/certified				
RS485 Surge Protection Plug-in	Supplied with the inverter, Built-in				
DC Surge Protection	Type II, field replaceable, optional	Type II, field replaceable, Built-in			
AC Surge Protection	-	Type II, field replaceable, Built-in			
DC Fuses (Single Pole)	-	25A, Built-in			
Smart Energy Management	Export Limitation				
DC SAFETY SWITCH					
DC Disconnect	Integrated				
STANDARD COMPLIANCE					
Safety	UL1741, UL1741 SA, UL1699B, CSA C22.2, Canadian AFCI according to T.I.L. M-07				
Grid Connection Standards	IEEE1547, Rule 21, Rule 14 (HI)				
Emissions	FCC part15 class A				
INSTALLATION SPECIFICATIONS					
AC output conduit size / AWG range	3/4" minimum / 12-6 AWG	¾" or 1" / 6 - 10 AWG			
DC input conduit size / AWG range	¾" or 1" / 6 - 12 AWG				
Number of DC inputs pairs	2	4			
Dimensions with Safety Switch (H x W x D)	30.5 x 12.5 x 10.5 / 775 x 315 x 260	31.8 x 12.5 x 11.8 / 808 x 317 x 300			in / mm
Weight with Safety Switch	74.2 / 33.7	78.2 / 35.5			lb / kg
Cooling	Fans (user replaceable)				
Noise	< 50	< 62			dBA
Operating Temperature Range	-40 to +140 / -40 to +60[4]				˚F / ˚C
Protection Rating	NEMA 3R				
Mounting	Bracket provided				

(1) For 120/208V inverters refer to: https://www.solaredge.com/sites/default/files/se-three-phase-us-inverter-208V-setapp-datasheet.pdf
(2) For other regional settings please contact SolarEdge support
(3) Where permitted by local regulations
(4) For power de-rating information refer to: https://www.solaredge.com/sites/default/files/se-temperature-derating-note-na.pdf

© SolarEdge Technologies, Inc. All rights reserved. SOLAREDGE, the SolarEdge logo, OPTIMIZED BY SOLAREDGE are trademarks or registered trademarks of SolarEdge Technologies, Inc.
All other trademarks mentioned herein are trademarks of their respective owners. Date: 06/2021 DS-000070-2.1-NA. Subject to change without notice.

CE

Three Phase Inverters for the 277/480V Grid

for North America

SE20KUS / SE30KUS / SE33.3KUS

INVERTERS

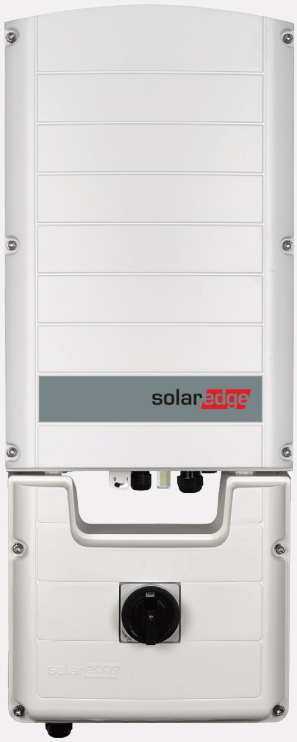

12-20 YEAR WARRANTY

The best choice for SolarEdge enabled systems

- Quick and easy inverter commissioning directly from a smartphone using the SolarEdge SetApp
- Specifically designed to work with power optimizers
- Superior efficiency (98%)
- Fixed voltage inverter for longer strings
- Integrated Safety Switch
- UL1741 SA certified, for CPUC Rule 21 grid compliance
- Integrated arc fault protection and rapid shutdown for NEC 2014 and 2017, per article 690.11 and 690.12
- Built-in module-level monitoring
- Internet connection through Ethernet or Wireless
- Small, lightweight, and easy to install outdoors or indoors on provided bracket
- Supplied with RS485 Surge Protection Device, to better withstand lightning events

solaredge

/ Three Phase Inverters for the 277/480V Grid[1] for North America

SE20KUS / SE30KUS / SE33.3KUS

MODEL NUMBER	SE20KUS	SE30KUS	SE33.3KUS	
APPLICABLE TO INVERTERS WITH PART NUMBER	SEXXK-XXXXXBXX4			
OUTPUT				
Rated AC Power Output	20000	30000	33300	VA
Maximum AC Power Output	20000	30000	33300	VA
Output Line Connections	3 phase, 4-wire / PE (L1-L2-L3-N), TN, TT			
AC Output Voltage Minimum-Nominal-Maximum[2] (L-N)	244-277-305			Vac
AC Output Voltage Minimum-Nominal-Maximum[2] (L-L)	422.5-480-529			Vac
AC Frequency Min-Nom-Max[2]	59.3 - 60 - 60.5			Hz
Maximum Continuous Output Current (per Phase)	24	36.5	40	A
GFDI Threshold	1			A
Utility Monitoring, Islanding Protection, Country Configurable Set Points	Yes			
THD	≤ 3			%
INPUT				
Maximum DC Power (Module STC)	27000	40500	45000	W
Transformer-less, Ungrounded	Yes			
Maximum Input Voltage DC to Gnd	490			Vdc
Maximum Input Voltage DC+ to DC-	1000			Vdc
Nominal Input Voltage DC to Gnd	420			Vdc
Nominal Input Voltage DC+ to DC-	850			Vdc
Maximum Input Current	26.5	39	40	Adc
Maximum Input Short Circuit Current	45			Adc
Reverse-Polarity Protection	Yes			
Ground-Fault Isolation Detection	1MΩ Sensitivity	350kΩ Sensitivity[3]		
CEC Weighted Efficiency	98	98.5		%
Night-time Power Consumption	< 3	< 4		W
ADDITIONAL FEATURES				
Supported Communication Interfaces	RS485, Ethernet, Built-in Cellular (optional)			
Inverter Commissioning	With the SetApp mobile application using built-in access point for local connection			
Rapid Shutdown – NEC 2014 and 2017 690.12	Automatic Rapid Shutdown upon AC Grid Disconnect[4]			
RS485 Surge Protection Plug-in	Supplied with the inverter			
Smart Energy Management	Export Limitation			
STANDARD COMPLIANCE				
Safety	UL1741, UL1741 SA, UL1699B, CSA C22.2, Canadian AFCI according to T.I.L. M-07			
Grid Connection Standards	IEEE1547, Rule 21, Rule 14 (HI)			
Emissions	FCC part15 class B			
INSTALLATION SPECIFICATIONS				
AC output conduit size / AWG range	3/4" minimum / 12-6 AWG	3/4" minimum / 8-4 AWG		
DC input conduit size / AWG range	3/4" minimum / 12-6 AWG			
Number of DC inputs	2 pairs	3 pairs[4]		
Dimensions (H x W x D)	21 x 12.5 x 10.5 / 540 x 315 x 260			in / mm
Dimensions with Safety Switch (H x W x D)	30.5 x 12.5 x 10.5 / 775 x 315 x 260			in / mm
Weight	73.2 / 33.2	93.6 / 42.5		lb / kg
Weight with Safety Switch	79.7 / 36.2	100.3 / 45.5		lb / kg
Cooling	Fans (user replaceable)			
Noise	< 50	< 55		dBA
Operating Temperature Range	-40 to +140 / -40 to +60[5]			˚F / ˚C
Protection Rating	NEMA 3R			

(1) For 120/208V inverters refer to: https://www.solaredge.com/sites/default/files/se-three-phase-us-inverter-208V-setapp-datasheet.pdf
(2) For other regional settings please contact SolarEdge support
(3) Where permitted by local regulations
(4) Field replacement kit for 1 pair of inputs P/N: DCD-3PH-1TBK; Field replacement kit for 3 pairs of fuses and holders P/N: DCD-3PH-6FHK-S1
(5) For power de-rating information refer to: https://www.solaredge.com/sites/default/files/se-temperature-derating-note-na.pdf

© SolarEdge Technologies, Inc. All rights reserved. SOLAREDGE, the SolarEdge logo, OPTIMIZED BY SOLAREDGE are trademarks or registered trademarks of SolarEdge Technologies, Inc. All other trademarks mentioned herein are trademarks of their respective owners. Date: 07/2020/V01/ENG NAM. Subject to change without notice.

CE

Three Phase Inverter with Synergy Technology

For the 208V Grid for North America

SE50KUS

INVERTERS

Powered by unique pre-commissioning process for rapid system installation

- Pre-commissioning feature for automated validation of system components and wiring during the site installation process and prior to grid connection
- Easy 2-person installation with lightweight, modular design (each inverter consists of 3 Synergy units and one Synergy Manager)
- Independent operation of each Synergy unit enables higher uptime and easy serviceability
- Built-in thermal sensors detect faulty wiring ensuring enhanced protection and safety
- Built-in arc fault protection and rapid shutdown
- Built-in PID mitigation for maximized system performance
- Monitored* and field-replaceable surge protection devices, to better withstand surges caused by lightning or other events
- Built-in module-level monitoring with Ethernet or cellular communication for full system visibility

*Applicable only for DC and AC SPDs

solaredge

/ Three Phase Inverter with Synergy Technology

For the 208V Grid for North America

SE50KUS

Applicable to inverter with Part Numbers	SExxK-US02Ixxxx SE50KUS	
OUTPUT		
Rated AC Active Output Power	50000	W
Maximum AC Apparent Output Power	50000	VA
AC Output Line Connections	3W + PE, 4W + PE	
Supported Grids	WYE: TN-C, TN-S, TN-C-S, TT, IT; Delta: IT	
AC Output Voltage Minimum-Nominal-Maximum(1) (L-N)	105-120-132.5	Vac
AC Output Voltage Minimum-Nominal-Maximum(1) (L-L)	183-208-229	Vac
AC Frequency Min-Nom-Max(1)	59.5 - 60 - 60.5	Hz
Maximum Continuous Output Current (per Phase, PF=1)	139.5	Aac
GFDI Threshold	1	A
Utility Monitoring, Islanding Protection, Configurable Power Factor, Country Configurable Thresholds	Yes	
Total Harmonic Distortion	≤ 3	%
Power Factor Range	+/-0.2 to 1	
INPUT		
Maximum DC Power (Module STC) Inverter / Synergy Unit	75000 / 25000	W
Transformer-less, Ungrounded	Yes	
Maximum Input Voltage DC+ to DC-	600	Vdc
Operating Voltage Range	370 - 600	Vdc
Maximum Input Current	3 x 46.5	Adc
Reverse-Polarity Protection	Yes	
Ground-Fault Isolation Detection	167kΩ sensitivity per Synergy Unit(2)	
CEC Weighted Efficiency	97	%
Nighttime Power Consumption	< 12	W
ADDITIONAL FEATURES		
Supported Communication Interfaces(3)	2 x RS485, Ethernet, Wi-Fi (optional), Cellular (optional)	
Smart Energy Management	Export Limitation	
Inverter Commissioning	With the SetApp mobile application using built-in Wi-Fi access point for local connection	
Arc Fault Protection	Built-in, User Configurable (According to UL1699B)	
Photovoltaic Rapid Shutdown System	NEC 2014, 2017 and 2020, Built-in	
PID Rectifier	Nighttime, built-in	
RS485 Surge Protection (ports 1+2)	Type II, field replaceable, integrated	
AC, DC Surge Protection	Type II, field replaceable, integrated	
DC Fuses (Single Pole)	25A, integrated	
DC SAFETY SWITCH		
DC Disconnect	Built-in	
STANDARD COMPLIANCE		
Safety	UL1699B, UL1741, UL1741 SA, UL1998, CSA C22.2#107.1, Canadian AFCI according to T.I.L. M-07	
Grid Connection Standards	IEEE 1547, Rule 21, Rule 14 (HI)	
Emissions	FCC part 15 class A	

(1) For other regional settings please contact SolarEdge support
(2) Where permitted by local regulations
(3) For specifications of the optional communication options, visit https://www.solaredge.com/products/communication or the Resource Library webpage: https://www.solaredge.com/downloads#, to download the relevant product datasheet

/ Three Phase Inverter with Synergy Technology

For the 208V Grid for North America

SE50KUS

Applicable to inverter with Part Numbers	SExxK-US02Ixxxx SE50KUS	
INSTALLATION SPECIFICATIONS		
Number of Synergy Units per Inverter	3	
AC Max Conduit Size	2 ½"	in
Max AWG Line / PE	4/0 / 1/0	
DC Max Conduit Size	1 x 3" ; 2 x 2"	in
DC Input Inverter / Synergy Unit	12 / 4 pairs; 6-12 AWG	
Dimensions (H x W x D)	Synergy Unit: 22 x 12.9 x 10.75 / 558 x 328 x 273 Synergy Manager: 14.17 x 22.4 x 11.6 / 360 x 560 x 295	in / mm
Weight	Synergy Unit: 70.4 / 32 Synergy Manager: 39.6 / 18	lb / kg
Operating Temperature Range	-40 to +140 / -40 to +60(4)	℉ / ˚C
Cooling	Fan (user replaceable)	
Noise	< 67	dBA
Protection Rating	NEMA 3R	
Mounting	Brackets provided	

(4) For power de-rating information refer to: https://www.solaredge.com/sites/default/files/se-temperature-derating-note.pdf

© SolarEdge Technologies, Ltd. All rights reserved. SOLAREDGE, the SolarEdge logo, OPTIMIZED BY SOLAREDGE are trademarks or registered trademarks of SolarEdge Technologies, Inc. All other trademarks mentioned herein are trademarks of their respective owners. Date: February 21, 2022 DS-000037-1.3- NA. Subject to change without notice.

CE RoHS

Three Phase Inverters for the 120/208V Grid

For North America

SE14.4KUS / SE17.3KUS

INVERTERS

12-20 YEAR WARRANTY

The best choice for SolarEdge enabled systems

- Specifically designed to work with power optimizers
- Quick and easy inverter commissioning directly from a smartphone using the SolarEdge SetApp
- Fixed voltage inverter for superior efficiency (97.5%) and longer strings
- Built-in type 2 DC and AC Surge Protection, to better withstand lightning events
- Small, lightest in its class, and easy to install outdoors or indoors on provided bracket
- Integrated arc fault protection and rapid shutdown for NEC 2014 and 2017, per article 690.11 and 690.12
- Built-in module-level monitoring with Ethernet, wireless or cellular communication for full system visibility
- Integrated Safety Switch
- UL1741 SA certified, for CPUC Rule 21 grid compliance

solaredge

/ Three Phase Inverters for the 120/208V Grid[1]

For North America

SE14.4KUS / SE17.3KUS

MODEL NUMBER	SE14.4KUS	SE17.3KUS	UNITS
APPLICABLE TO INVERTERS WITH PART NUMBER	SEXXK-USX2IXXXX		
OUTPUT			
Rated AC Power Output	14400	17300	W
Maximum apparent AC output power	14400	17300	VA
AC Output Line Connections	3W + PE, 4W + PE		
AC Output Voltage Minimum-Nominal-Maximum[2] (L-N)	105-120-132.5		Vac
AC Output Voltage Minimum-Nominal-Maximum[2] (L-L)	183-208-229		Vac
AC Frequency Min-Nom-Max[2]	59.3 - 60 - 60.5		Hz
Continuous Output Current (per Phase)	40	48.25	Aac
GFDI Threshold	1		A
Utility Monitoring, Islanding Protection, Country Configurable Set Points	Yes		
THD	≤ 3		%
Power Factor Range	+/- 0.85 to 1		
INPUT			
Maximum DC Power (Module STC)	21600	26000	W
Transformer-less, Ungrounded	Yes		
Maximum Input Voltage DC+ to DC-	600		Vdc
Operating Voltage Range	370 - 600		Vdc
Maximum Input Current	40	48.25	Adc
Maximum Input Short Circuit Current	55		Adc
Reverse-Polarity Protection	Yes		
Ground-Fault Isolation Detection	167kΩ Sensitivity[3]		
CEC Weighted Efficiency	97.5		%
Night-time Power Consumption	< 4		W
ADDITIONAL FEATURES			
Supported Communication Interfaces	2 x RS485, Ethernet, Cellular (optional)		
Inverter Commissioning	With the SetApp mobile application using built-in Wi-Fi access point for local connection		
Rapid Shutdown	NEC2014, NEC2017 and NEC2020 compliant/certified		
RS485 Surge Protection Plug-in	Supplied with the inverter, Built-in		
AC, DC Surge Protection	Type II, field replaceable, Built-in		
DC Fuses (Single Pole)	25A, Built-in		
Smart Energy Management	Export Limitation		
DC SAFETY SWITCH			
DC Disconnect	Integrated		
STANDARD COMPLIANCE			
Safety	UL1741, UL1741 SA, UL1699B, CSA C22.2, Canadian AFCI according to T.I.L. M-07		
Grid Connection Standards	IEEE1547, Rule 21, Rule 14 (HI)		
Emissions	FCC part15 class A		
INSTALLATION SPECIFICATIONS			
AC output conduit size /AWG range	¾" or 1" / 6 - 10 AWG		
DC input conduit size / AWG range	¾" or 1" / 6 - 12 AWG		
Number of DC inputs pairs	4		
Dimensions with Safety Switch (H x W x D)	31.8 x 12.5 x 11.8 / 808 x 317 x 300		in / mm
Weight with Safety Switch	78.2 / 35.5		lb / kg
Cooling	Fans (user replaceable)		
Noise	< 62		dBA
Operating Temperature Range	-40 to +140 / -40 to +60[4]		˚F / ˚C
Protection Rating	NEMA 3R		
Mounting	Bracket provided		

(1) For 277/480V inverters refer to: https://www.solaredge.com/sites/default/files/se-three-phase-us-inverter-277-480V-setapp-datasheet.pdf
(2) For other regional settings please contact SolarEdge support
(3) Where permitted by local regulations
(4) For power de-rating information refer to: https://www.solaredge.com/sites/default/files/se-temperature-derating-note-na.pdf

© SolarEdge Technologies, Inc. All rights reserved. SOLAREDGE, the SolarEdge logo, OPTIMIZED BY SOLAREDGE are trademarks or registered trademarks of SolarEdge Technologies, Inc. All other trademarks mentioned herein are trademarks of their respective owners. Date: 06/2021 DS-000069-2.0-NA. Subject to change without notice.

CE

Three Phase Inverters for the 120/208V Grid

for North America

SE9KUS

INVERTERS

12-20 YEAR WARRANTY

The best choice for SolarEdge enabled systems

- Specifically designed to work with power optimizers
- Quick and easy inverter commissioning directly from a smartphone using the SolarEdge SetApp
- Internet connection through Ethernet or Wireless
- Fixed voltage inverter for longer strings
- UL1741 SA certified, for CPUC Rule 21 grid compliance
- Built-in module-level monitoring
- Integrated arc fault protection and rapid shutdown for NEC 2014, 2017 and 2020, per article 690.11 and 690.12
- Integrated Safety Switch
- Supplied with RS485 Surge Protection, to better withstand lightning events
- Small, lightweight, and easy to install outdoors or indoors on provided bracket

solaredge

/ Three Phase Inverters for the 120/208V Grid[1] for North America

SE9KUS

APPLICABLE TO INVERTERS WITH PART NUMBER	SEXXK-XXXXXBXX4	
MODEL NUMBER	SE9KUS	
OUTPUT		
Rated AC Power Output	9000	VA
Maximum AC Power Output	9000	VA
Output Line Connections	3 phase, 3-wire / PE (L1-L2-L3), TN, TT 3 phase, 4-wire / PE (L1-L2-L3-N), TN, TT	
AC Output Voltage Minimum-Nominal-Maximum[2] (L-N)	105-120-132.5	Vac
AC Output Voltage Minimum-Nominal-Maximum[2] (L-L)	183-208-229	Vac
AC Frequency Min-Nom-Max[2]	59.3 - 60 - 60.5	Hz
Maximum Continuous Output Current (per Phase)	25	A
GFDI Threshold	1	A
Utility Monitoring, Islanding Protection, Country Configurable Set Points	Yes	
THD	≤ 3	%
INPUT		
Maximum DC Power (Module STC)	12150	W
Transformer-less, Ungrounded	Yes	
Maximum Input Voltage DC to Gnd	250	Vdc
Maximum Input Voltage DC+ to DC-	500	Vdc
Nominal Input Voltage DC to Gnd	200	Vdc
Nominal Input Voltage DC+ to DC-	400	Vdc
Maximum Input Current	26.5	Adc
Maximum Input Short Circuit Current	45	Adc
Reverse-Polarity Protection	Yes	
Ground-Fault Isolation Detection	1MΩ Sensitivity[3]	
CEC Weighted Efficiency	96.5	%
Night-time Power Consumption	< 3	W
ADDITIONAL FEATURES		
Supported Communication Interfaces	RS485, Ethernet, Built-in Cellular (optional)	
Inverter Commissioning	With the SetApp mobile application using built-in access point for local connection	
Rapid Shutdown – NEC 2014, 2017 and 2020 690.12	Automatic Rapid Shutdown upon AC Grid Disconnect	
RS485 Surge Protection Plug-in	Supplied with the inverter	
Smart Energy Management	Export Limitation	
STANDARD COMPLIANCE		
Safety	UL1741, UL1741 SA, UL1699B, CSA C22.2, Canadian AFCI according to T.I.L. M-07	
Grid Connection Standards	IEEE1547, Rule 21, Rule 14 (HI)	
Emissions	FCC part15 class B	
INSTALLATION SPECIFICATIONS		
AC output conduit size / AWG range	3/4" minimum / 8-4 AWG	
DC input conduit size / AWG range	3/4" minimum / 12-6 AWG	
Number of DC inputs[4]	2 pairs	
Dimensions (H x W x D)	21 x 12.5 x 10.5 / 540 x 315 x 260	in / mm
Dimensions with Safety Switch (H x W x D)	30.5 x 12.5 x 10.5 / 775 x 315 x 260	in / mm
Weight	93.6 / 42.5	lb / kg
Weight with Safety Switch	100.3 / 45.5	lb / kg
Cooling	Fans (user replaceable)	
Noise	< 55	dBA
Operating Temperature Range	-40 to +140 / -40 to +60[5]	˚F / ˚C
Protection Rating	NEMA 3R	

(1) For 277/480V inverters refer to: https://www.solaredge.com/sites/default/files/se-three-phase-us-inverter-277-480V-setapp-datasheet.pdf
(2) For other regional settings please contact SolarEdge support
(3) Where permitted by local regulations
(4) Field replacement kit for 1 pair of inputs P/N: DCD-3PH-1TBK; Field replacement kit for 3 pairs of fuses and holders P/N: DCD-3PH-6FHK-S1
(5) For power de-rating information refer to: https://www.solaredge.com/sites/default/files/se-temperature-derating-note-na.pdf

© SolarEdge Technologies, Inc. All rights reserved. SOLAREDGE, the SolarEdge logo, OPTIMIZED BY SOLAREDGE are trademarks or registered trademarks of SolarEdge Technologies, Inc.
All other trademarks mentioned herein are trademarks of their respective owners. Date: 04/2021 DS-000034-2.0-NA. Subject to change without notice.

CE